




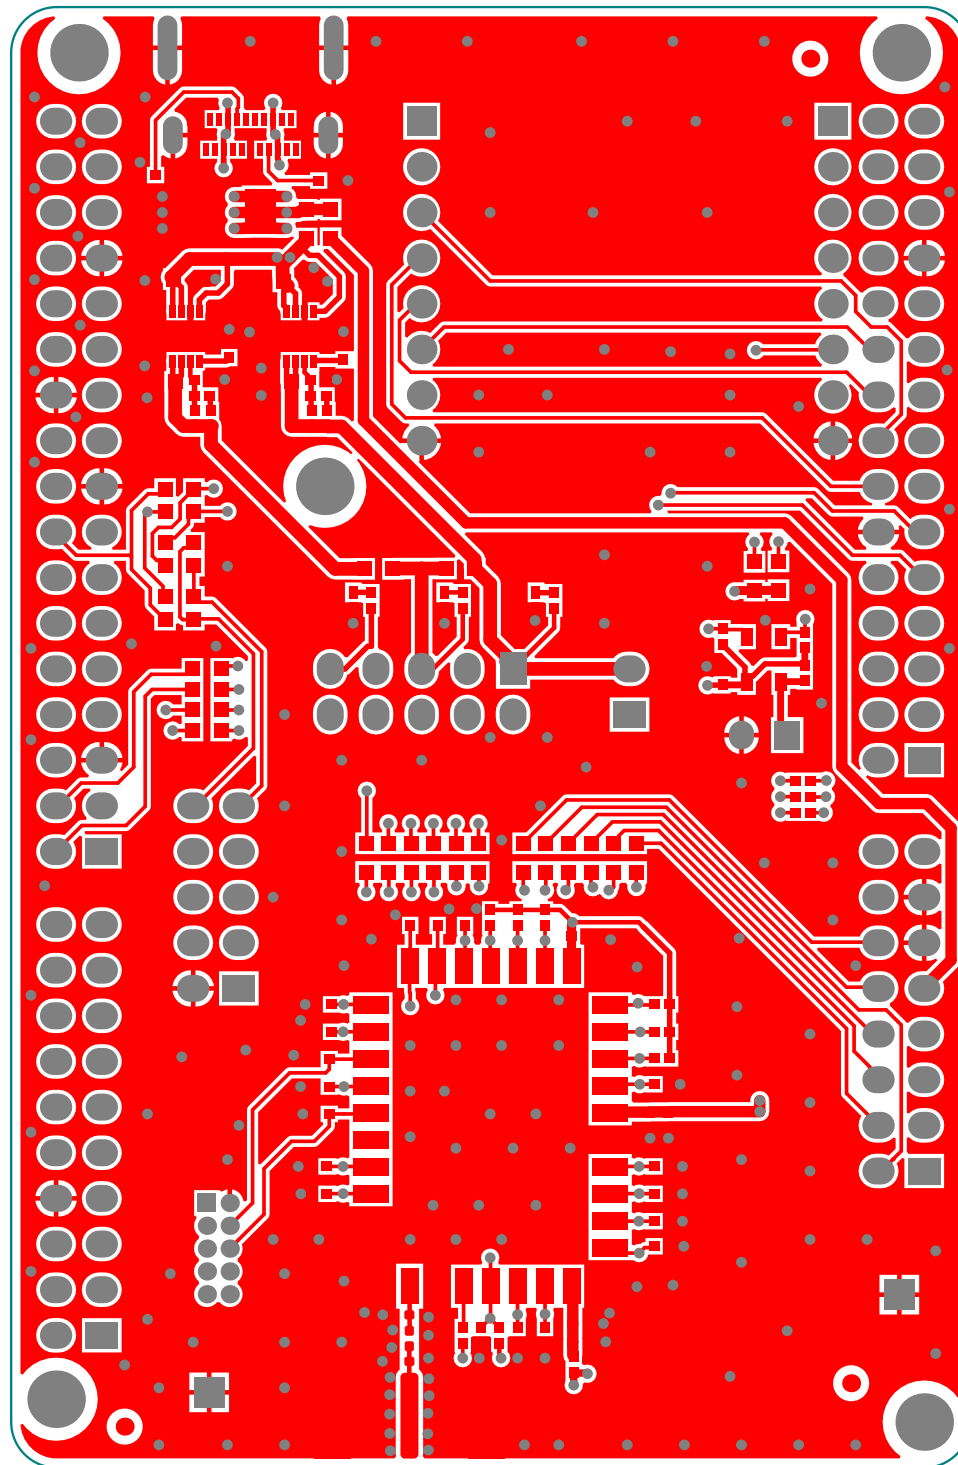


Top Layer

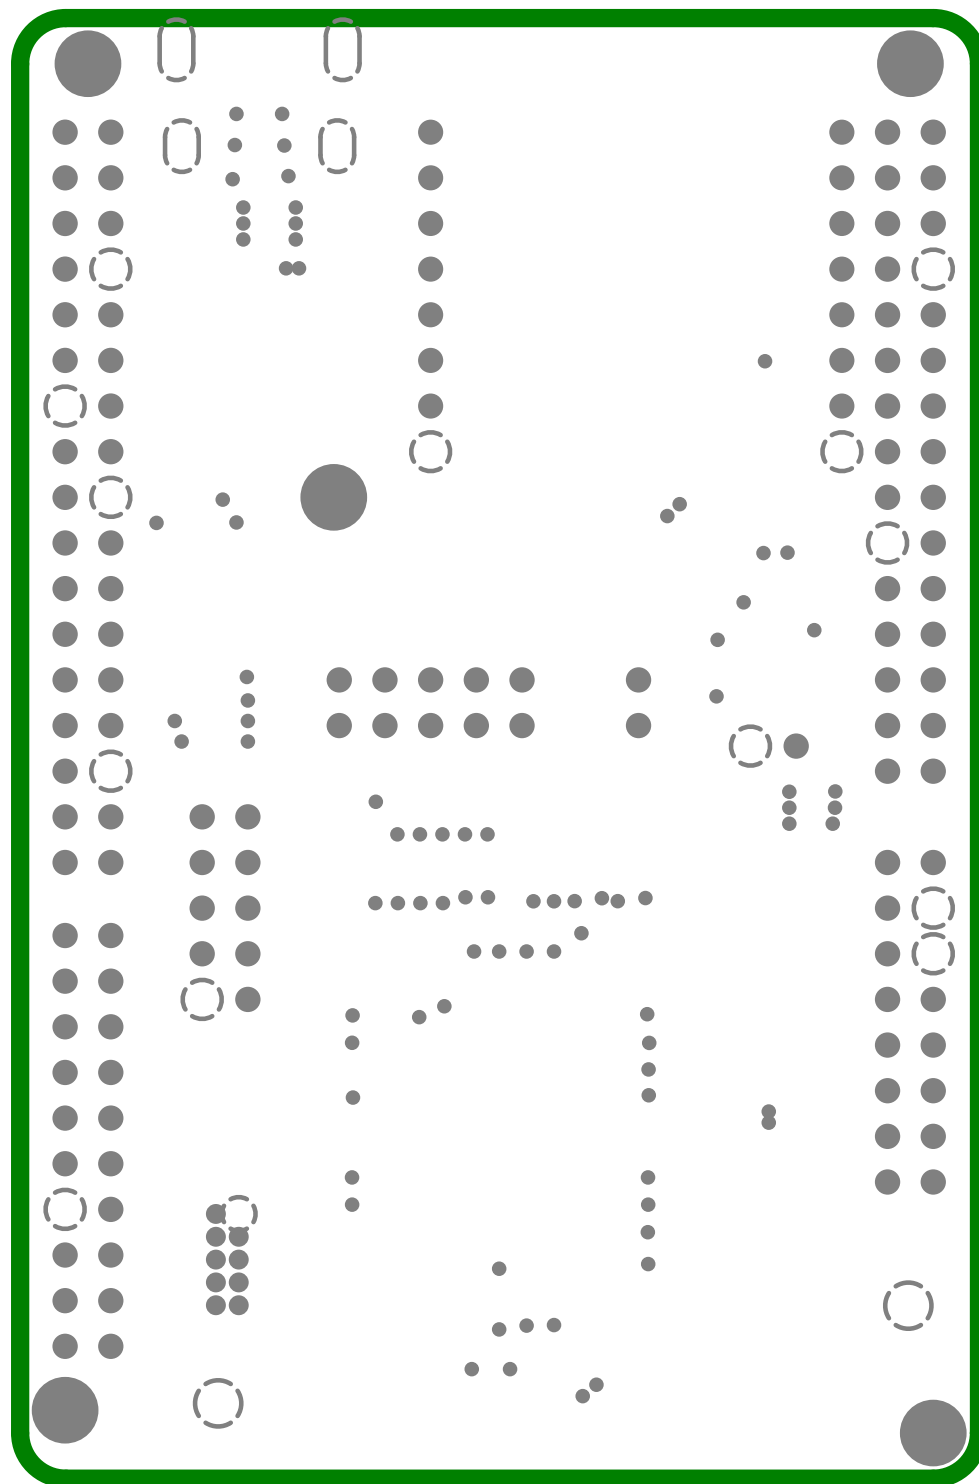


Ground Plane

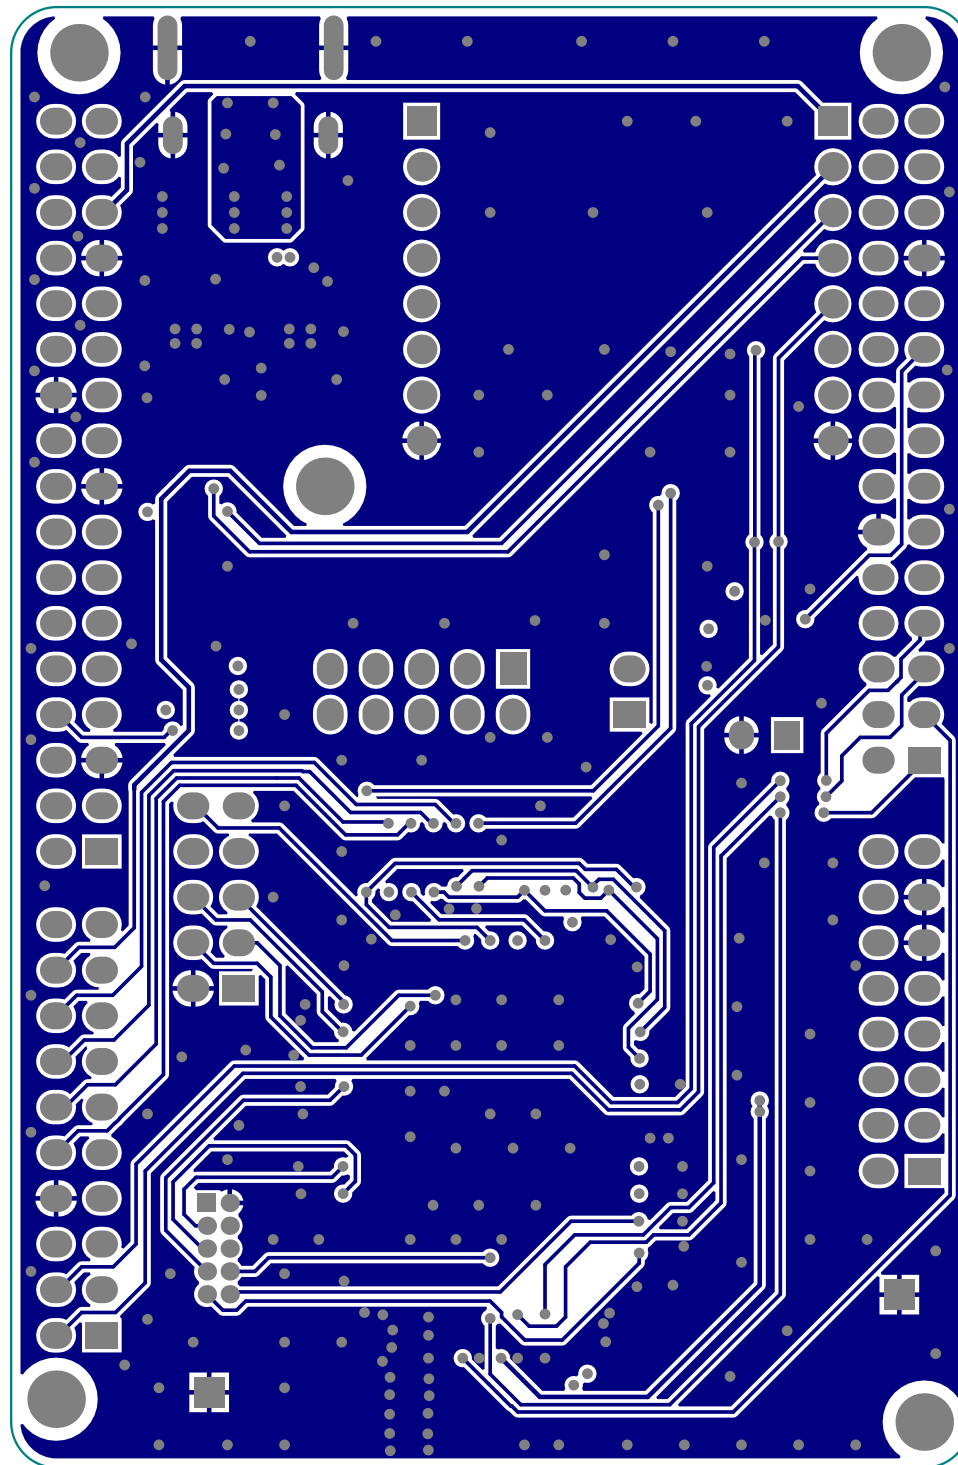


Mid Layer 1

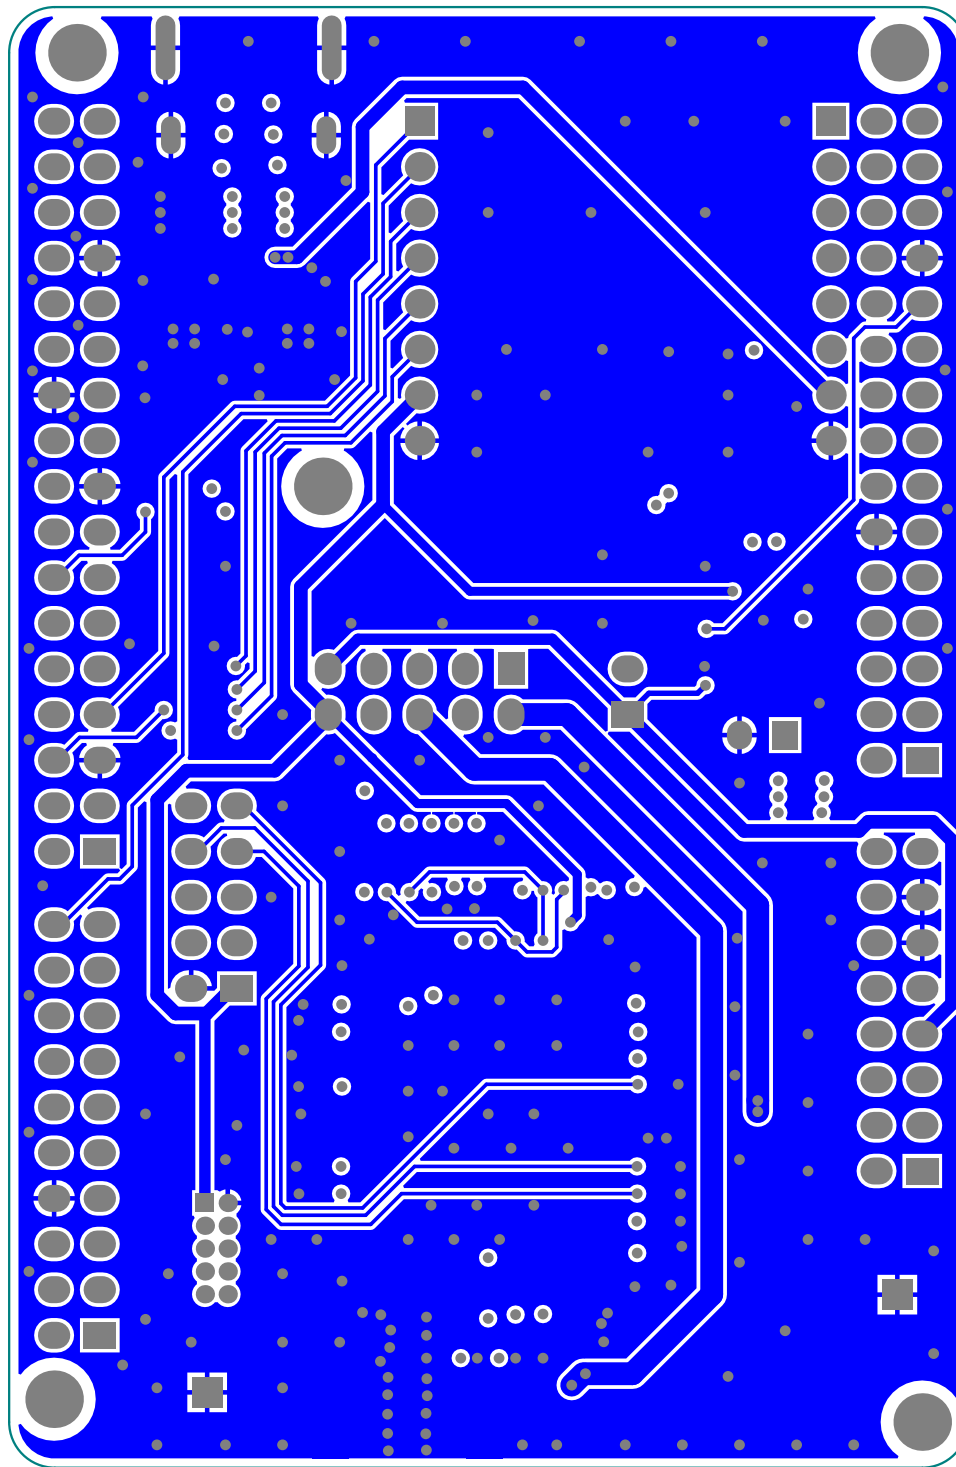


Bottom Layer

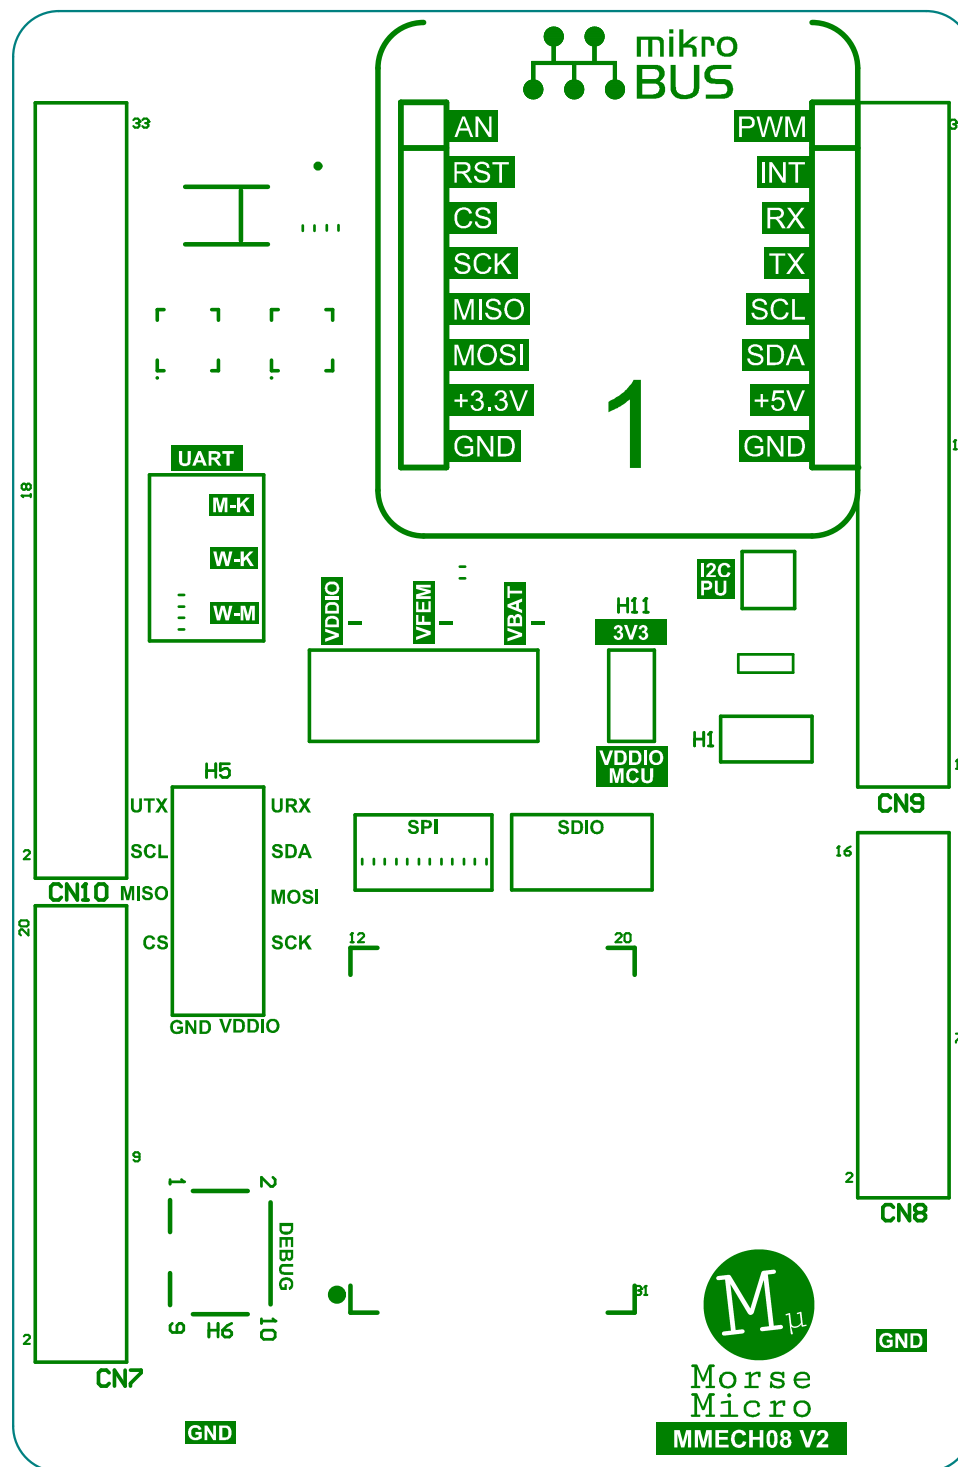


Top Overlay

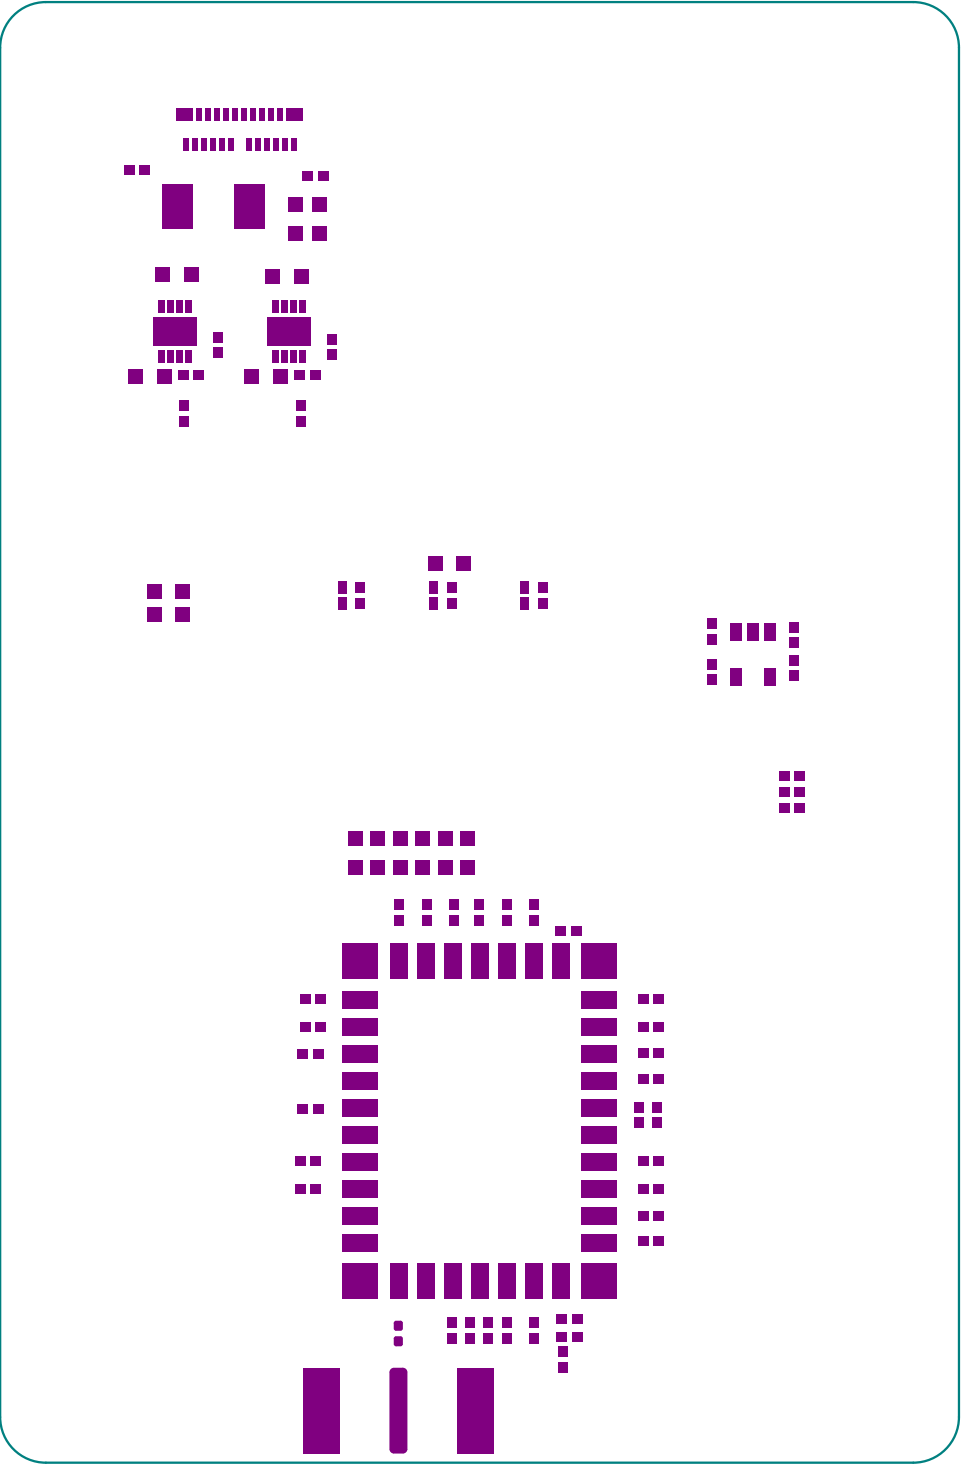


Top Paste

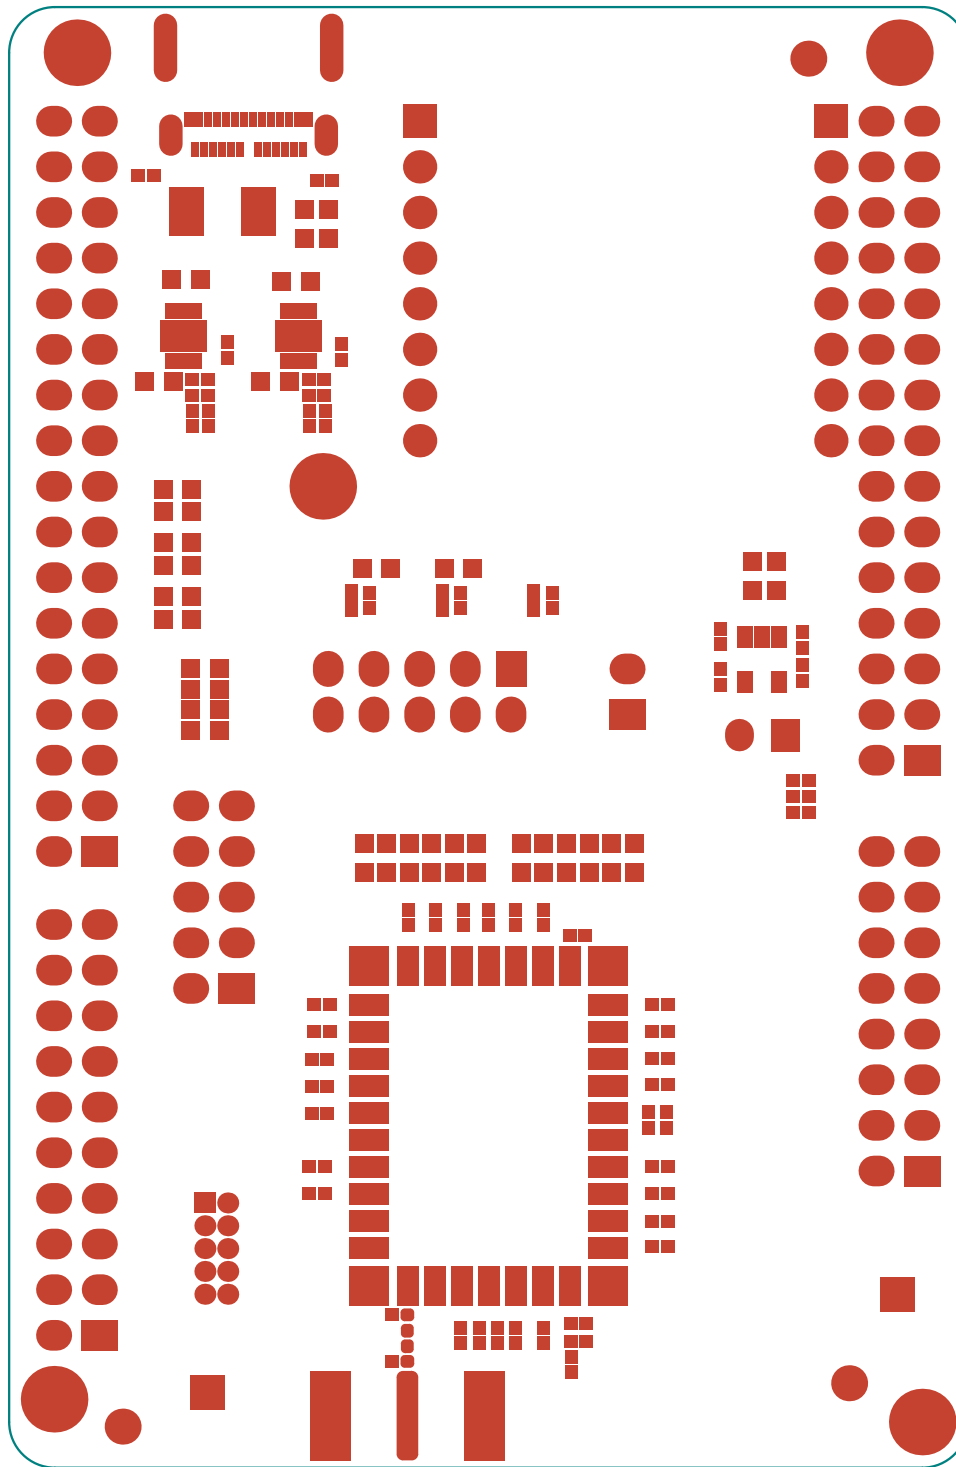


Top Solder

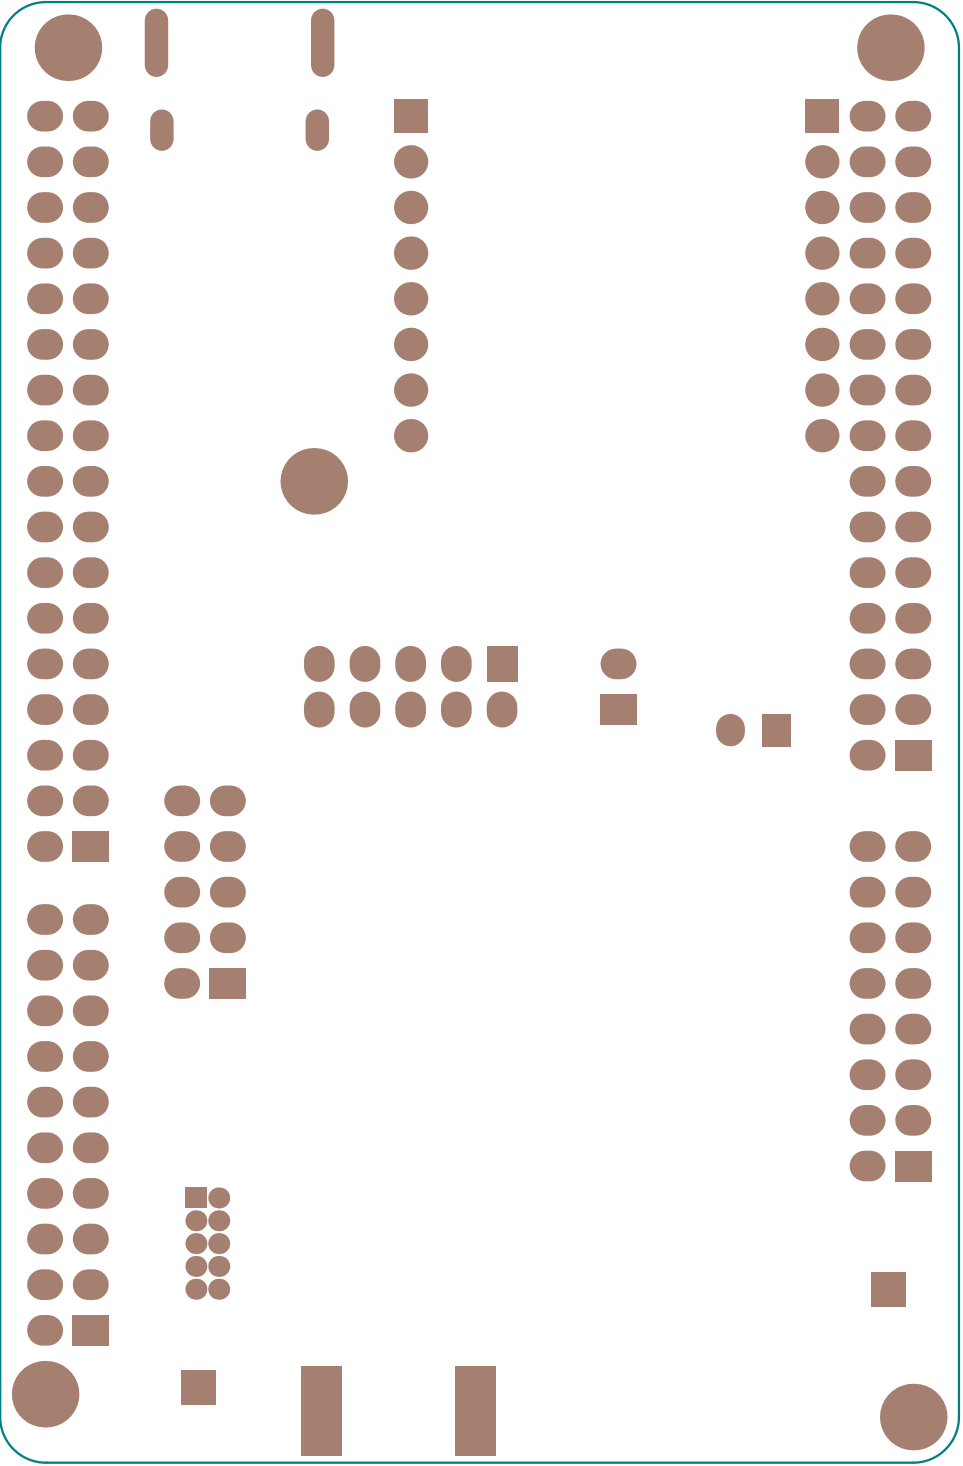

Bottom Solder

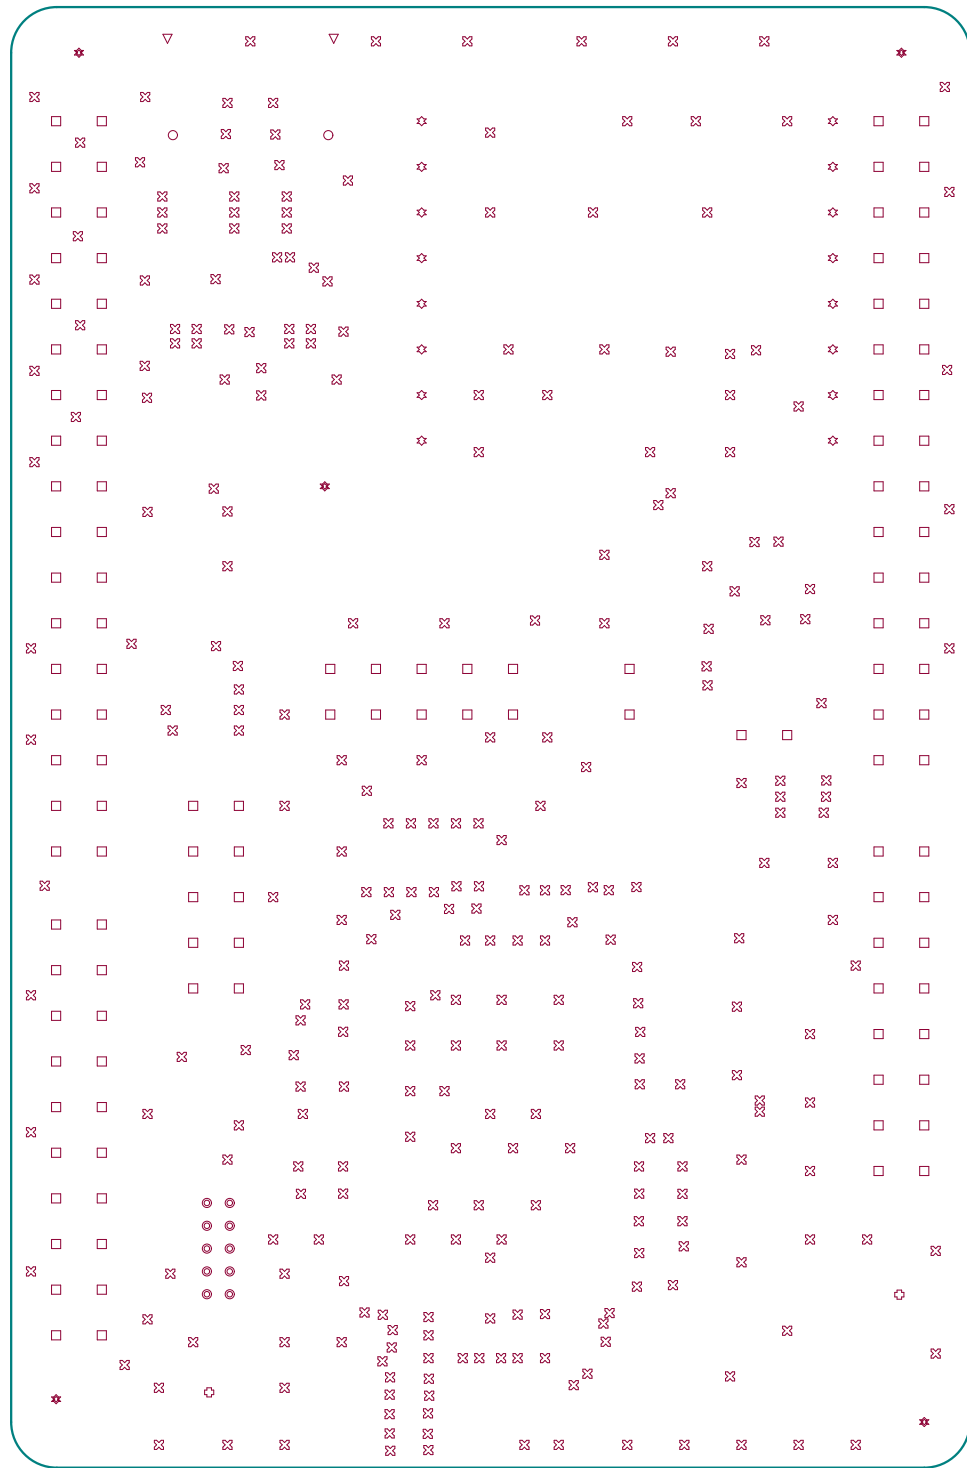

Drill Drawing

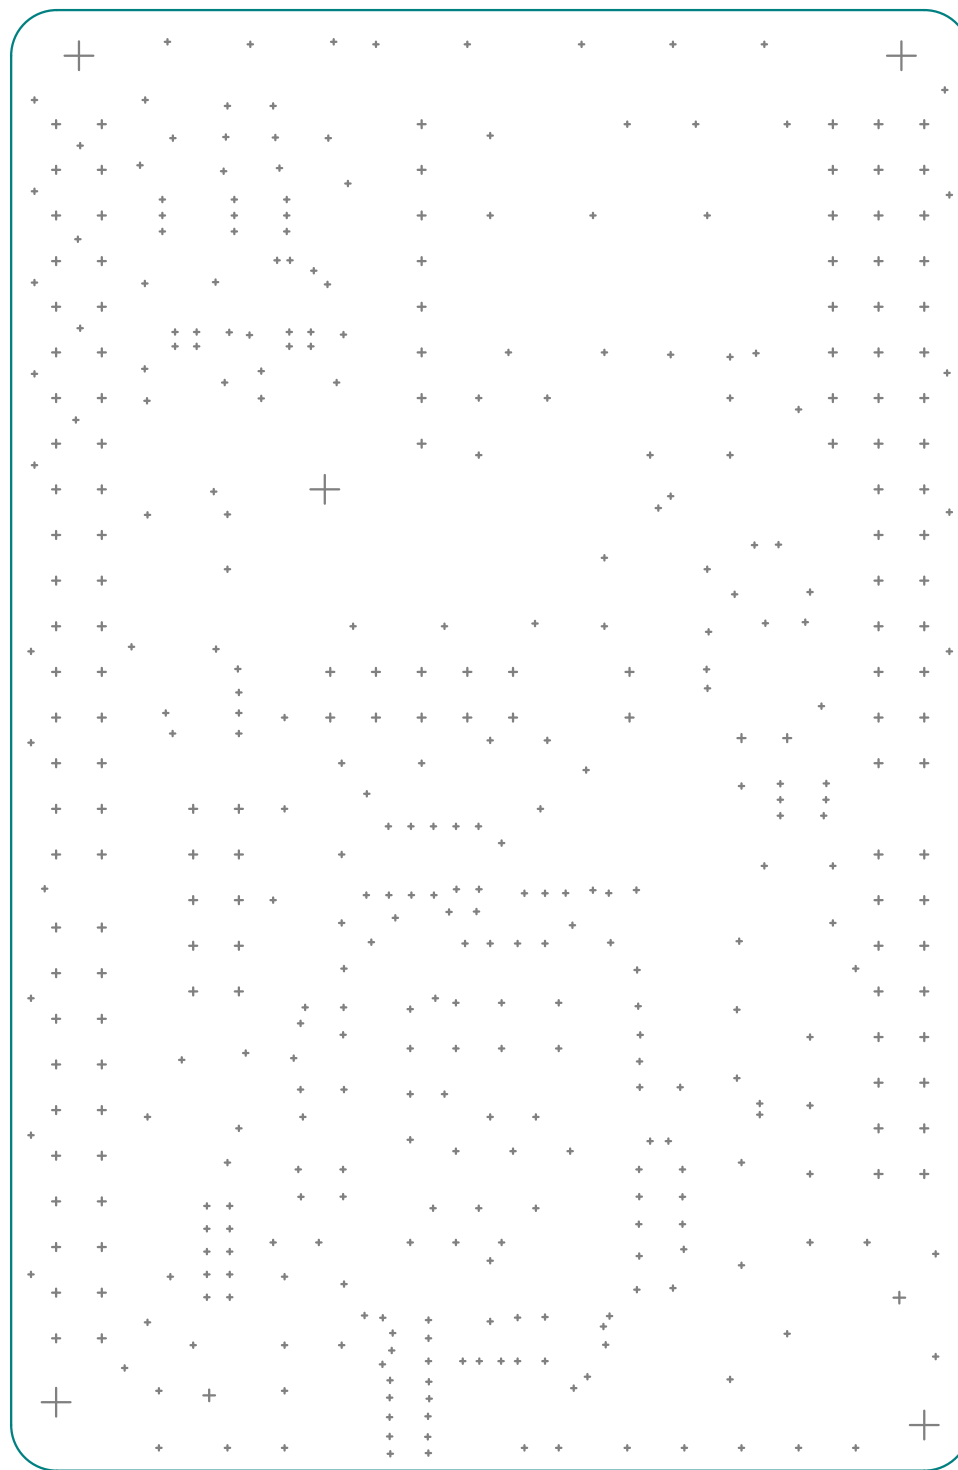

NOTES: UNLESS OTHERWISE SPECIFIED0

1. SPECIFICATIONS/TOLERANCES:

- A. FABRICATE PER IPC-6012, CLASS 2, USING PROVIDED DATA FILES XXXXXXXX.ZIP
- B. ALL SPECIFICATIONS USED SHALL BE PER THEIR LATEST REVISIONS.
- C. THE DIMENSIONS OF CIRCUIT FEATURES IN THE PROVIDED DATA MAY BE ADJUSTED ONLY TO COMPENSATE FOR PROCESS TOLERANCES; ADDING, REMOVING OR RELOCATING CIRCUIT FEATURES IS NOT ALLOWED
- D. REMOVE ALL BURRS AND BREAK SHARP EDGES, .381 [.015] MAX RADIUS.
- E. PARENTHETICAL INFORMATION IS FOR REFERENCE ONLY.
- F. REPAIR OF PCB DEFECTS IS NOT PERMITTED.

2. DIELECTRIC MATERIAL:

- A. DIELECTRIC MATERIAL SHALL BE PER IPC-4101/99, /124, /126 OR /129 (RoHS COMPLIANT EPOXY-GLASS)
- B. MINIMUM DIELECTRIC THICKNESS SHALL BE .051 [.002] FOR REFERENCED STACK-UP DIMENSIONS OF .076 [.003] OR GREATER; IPC-6012 REQUIREMENTS SHALL OTHERWISE APPLY. SINGLE-PLY CONSTRUCTION IS ALLOWED.
- C. SEE LAYER STACK-UP FOR REQUIRED COPPER WEIGHTS AND THE FINISHED PCB THICKNESS. IF SPECIFIED, 1/3 OZ. STARTING FOIL MAY BE ACHIEVED BY 1/2 OZ. FOIL REDUCTION.
- D. FINISHED PCB THICKNESS SHALL BE MEASURED OVER LANDS AND/OR CONDUCTORS NOT COVERED BY SOLDER MASK. IF SPECIFIED, 1/3 OZ. STARTING FOIL MAY BE ACHIEVED BY 1/2 OZ. FOIL REDUCTION.

3. DRILLING:

- A. VIA DIAMETERS SHALL BE VERIFIED BEFORE PLATING; ALL OTHER HOLE DIAMETERS ARE FINISHED DIMENSIONS.
- B. LAYER-TO-LAYER MISREGISTRATION SHALL BE .127 [.005] MAXIMUM.

4. SOLDER MASK:

- A. APPLY LPI SOLDER MASK OVER BARE COPPER USING PROVIDED DATA.
- B. SOLDER MASK SHALL BE PER IPC-SM-840, CLASS T, COLOR PURPLE.
- C. THE DIMENSIONS OF SOLDER MASK-DEFINED PADS ON PLANES AND/OR WIDE CONDUCTORS SHALL NOT BE MODIFIED.

5. SILKSCREEN/MARKING:

- A. SILKSCREEN PCB PER PROVIDED DATA USING PERMANENT, NON-CONDUCTIVE INK, COLOR WHITE.
- B. SUPPLIER ID AND TRACEABILITY INFORMATION SHALL NOT BE APPLIED ON ANY PART OF THE PCB
- C. INK SHALL NOT BE APPLIED TO ANY SOLDERABLE SURFACE. USING PROVIDED DATA.


6. ELECTRICAL TEST:

- A. DESIGN VERIFICATION SHALL BE DONE PRIOR TO PCB FABRICATION USING GERBER DATA AND AN IPC-D-356 NETLIST.
- B. ALL PCBs SHALL BE 100% ELECTRICALLY TESTED FOR OPENS AND SHORTS
- C. APPLY TEST STAMP IN NON-LEGEND AREA ON SECONDARY SIDE OF PCB.

7. FINAL FINISH:

- A. FINAL FINISH SHALL BE ELECTROLESS NICKEL/IMMERSION GOLD (ENIG) PER IPC-4552.

9. IF PANELIZATION SPECIFICATIONS ARE PROVIDED, THE PCBs SHALL BE DELIVERED IN PANEL FORM. HOWEVER, THESE SPECIFICATIONS MAY BE REPLACED BY SUPPLIER PREFERRED (SPECIFICATIONS AS APPROVED).

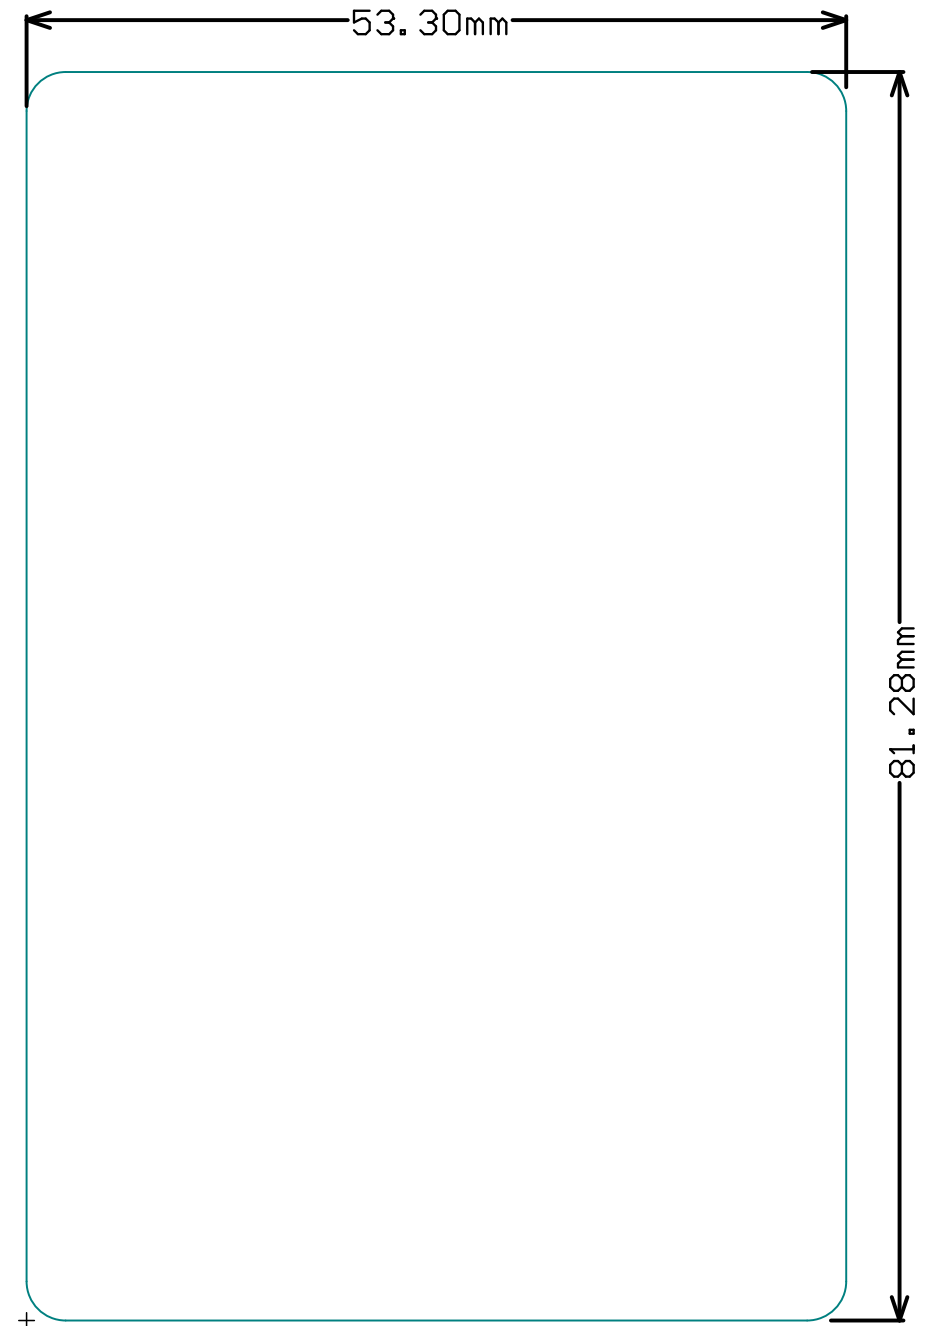

	Project: MMECH08	
	Company: Morse Micro	
	Drawn By: Chad O'Neill	
Date: 11/04/2022		Rev: 2


A

B

C


D

E

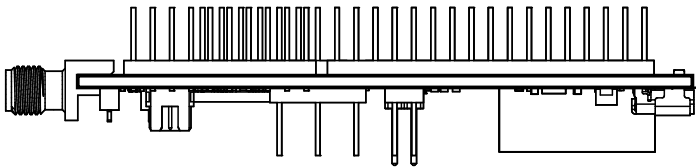


View from Left side (Scale 1:1)



View from Front side (Scale 1:1)

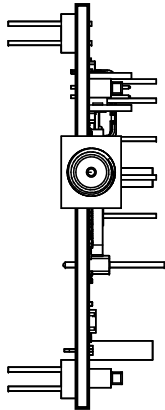

View from Top side (Scale 1:1)

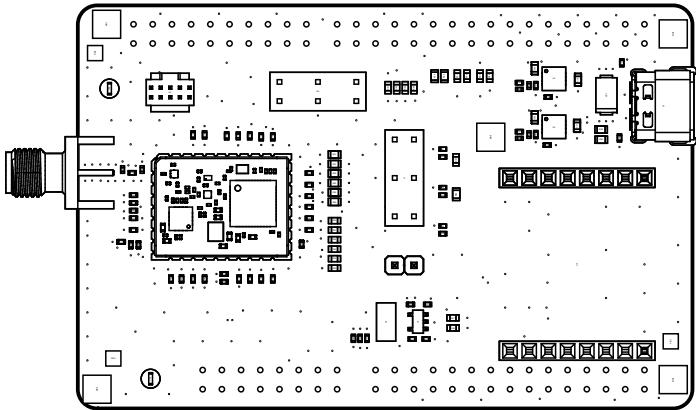

View from Back side (Scale 1:1)

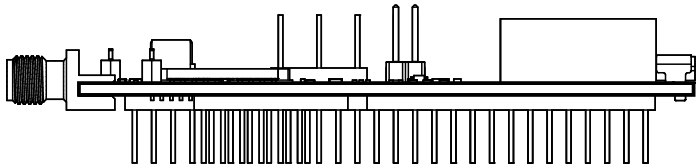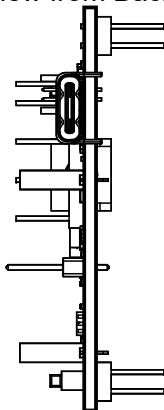

View from Right side (Scale 1:1)

Layer Stack Legend

	Material	Layer	Thickness	Dielectric Material	Type	Gerber
		Top Overlay			Legend	GTO
	Surface Material	Top Solder	0.02mm	SM-001	Solder Mask	GTS
	ENIG	Top Surface Finish	0.02mm		Surface Finish	
	CF-004	Top Layer	0.04mm		Signal	GTL
	Prepreg		0.17mm	PP	Dielectric	
	CF-004	Ground Plane	0.04mm		Internal Plane	GP1
	Core		1.05mm	Core	Dielectric	
	CF-004	Mid Layer 1	0.04mm		Signal	G1
	Prepreg		0.17mm	PP	Dielectric	
	CF-004	Bottom Layer	0.04mm		Signal	GBL
	ENIG	Bottom Surface Finish	0.02mm		Surface Finish	
	Surface Material	Bottom Solder	0.02mm	SM-001	Solder Mask	GBS
		Bottom Overlay			Legend	GBO

Total thickness: 1.60mm

Transmission Line Structure Table

Impedance Id	Transmission Line	Target Impedance	Calculated Impedance	Trace layer	Wide Trace Width	Reference layers	Clearance	Target Tolerance
1	Coated Coplanar Waveguide With Ground	50	50.18	Top Layer	0.25mm	Ground Plane	0.25mm	10%

A

B

C

D

E